


PRONTEAU tap features:


- 4 in 1 tap delivering, domestic hot and cold, ambient (cold) filtered and 98°C (variable) filtered water
- The dual stage handle mechanism on the hot handle has been designed with safety and ease of use in mind
- 360 degree rotation of spout allows for easy use and accessibility
- Metal construction throughout
- Scale inhibiting filter cartridge included
- 5 Year Warranty*
- WRAS approval pending

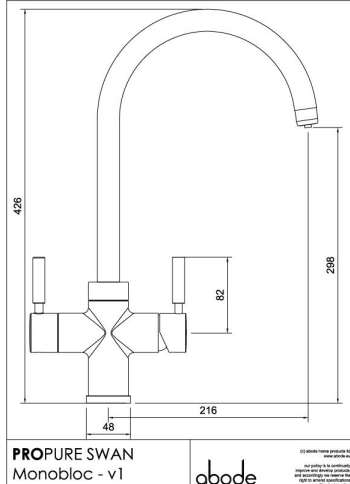

PROPURE SWAN
Monobloc - v1

abode

- **Overall Height / projection:** 426 mm
- **Exit spout reach:** 216 mm
- **Exit spout height:** 298 mm
- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø35 mm
- **Max. surface installation depth:** 45 mm
- 76mm from centre of tap hole to wall/backplash behind wall (Handles rotate backwards 45°)

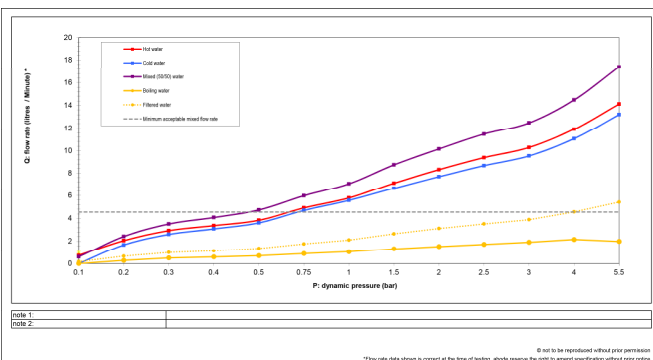

Flow rate data (litres / Minute) *

P: dynamic pressure (bar)

Q: flow rate (litres / Minute) *

Legend: Hot water, Cold water, Mixed (50/50) water, Boiling water, Filtered water, Minimum acceptable mixed flow rate.

*Flow rate data shown is correct at the time of testing, abode reserve the right to amend specification without prior notice.

PRONTEAU flow information and connectivity:

- **Min cold water pressure requirement:** 1.5 bar
- **Min hot water pressure requirement:** 0.50 bar
- **Recommended / Maximum (domestic) hot water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres/min):** 12.48
- **Control valve type:** 1 x Single lever 35mm, 1 x two way ceramic diverter
- **Product flow characteristics:** (H&C&F/Boiling) dual flow
- **Hot and Cold inlets:** Flexible hose connections supplied
- **Non return valve(s):** Yes, integral to cold inlet flexi hose only

Care instructions and Warranty Summary*


- Clean the tap regularly as required, using a mild soap and damp cloth, do not use any other cleaners, regular cleaning will prevent the build-up of lime scale and dirt
- Maintain the heater according to the user guide, for example replace filter and descale when required.
- Mixertap materials and workmanship defects warranted for 5 years
- Proboil2X materials and workmanship defects warranted for 2 years
- Mixertap valves and working parts warranted for 5 years
- Surface finish warranty defects warranted for 1 year
- All o-rings, hoses & gaskets warranted for 1 year



PROBOIL.2X features:

- Controllable tank temperature range from 75°C (holiday/eco mode) to 85,90,95,96, 97, 98°C using the touch screen controls.
- 2.1 Litre capacity tank, apx. 7 minutes reboil after use
- On screen filter life / replacement indicator
- Intelligent self-diagnostic control
- No external drain connection needed for a simplified and more flexible installation
- Flow limited to 2 litres/min to limit splashing and ensure a smooth flow
- Tool free, hand tight connectors to speed up installation, maintenance and descaling
- Compact size 22x22x28cm
- 2 Year Warranty*
- WRAS approved

All temperatures quoted are measured within the tank of the boiler and actual spout exit temperature may vary dependant on local conditions and tap model.

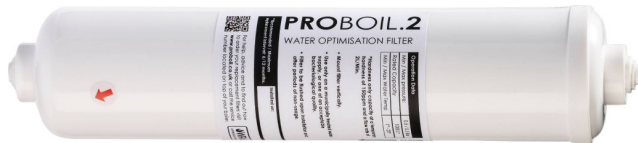

PROBOIL.2 filter features:

- Filtered 98°C drinking water, engineered specifically for hot water applications
- Included with every PROBOIL.2X system
- Recommended replacement interval 6 months
- Chlorine taste and odour reduction
- Scale reduction for better drinks and tank protection
- WRAS approved



The complete package:

Each PRONTEAU system includes:

- A stylish choice of PRONTEAU mixer taps
- PROBOIL.2X hot water boiler
- PROBOIL.2 scale control filter & assembly
- Comprehensive user and installation guide
- Nationwide professional maintenance and service support