

Product Finish: Brushed Nickel


Product code: PT1123  
EAN13 barcode: 5060344156974



## Product Features:


- Stylish 3 way mixer tap delivering domestic hot, cold and 98° filtered water
- The dual stage handle mechanism on the hot handle has been designed with safety and ease of use in mind
- 360 degree rotation of spout allows for easy use and accessibility
- Anti splash aerator as standard
- Features an energy saving cold start valve as standard
- 5 Year Warranty\*
- WRAS approval pending

## Product dimensions:

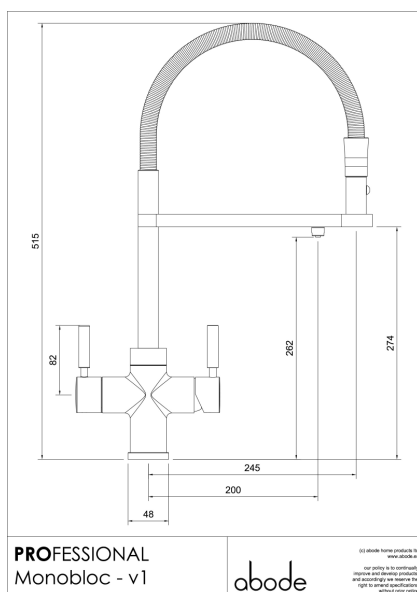

- Overall Height / projection: 427mm
- Exit spout reach: 245 mm
- Exit spout height: 274 mm
- Base diameter(s): 48 mm
- Recommended hole diameter: Ø35 mm
- Max. surface depth: 50 mm
- Spout diameter: 24 mm
- Spout aerator size: n/a

## Product flow characteristics:

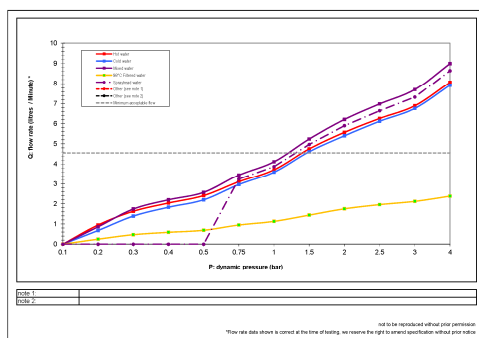

- Min cold water pressure: 1.5 bar
- Min hot water pressure: 1.20 bar
- Recommended / Maximum domestic hot water temperature: 46°C / 70°C
- Part G - Mixed flow rate at 3 bar (litres / min): 7.70
- Control valve type: 1 x 1/2" Ceramic disc QT, 1 x Single lever 35mm
- Product flow characteristics: (H&C/Boiling) dual flow
- Aerator type: Neoperl aerator honeycomb
- Hot and Cold inlet connections: flexi hose
- Non return valve(s): Yes, integral to cold inlet flexi hose only

## Care instructions summary:

- Clean the product regularly as required, using a mild soap and damp cloth, do not use any other cleaners, regular cleaning will prevent the build-up of lime scale and dirt
- Residues of sink & worktop cleaners can also cause damage to the mixer tap, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Mixer tap materials and workmanship defects warranted for 5 years
- Probol2 materials and workmanship defects warranted for 2 years
- Mixer tap valves and working parts warranted for 5 years
- Surface finish warranty defects warranted for 1 year
- All o-rings, hoses & gaskets warranted for 1 year



#### PROBOIL2 features:

- Compact size to fit discreetly into your base unit (Overall height 257mm, Width 217mm, Depth 175mm)
- Filtered water inlet
- 98 degree water outlet
- Safety steam vent to a standard dishwasher connection
- Removable tank lid for easy access, cleaning and descale
- 2 Litre tank
- Boiler can be floor or wall mounted
- UK manufactured boiler
- 2 Year Warranty\*
- WRAS approval pending

\*All temperatures quoted are measured within the tank of the boiler and actual spout exit temperature may vary dependant local conditions.

For further information refer to [proboil.co.uk](http://proboil.co.uk) and our user guide.

#### Our premium quality PROBOIL2 filter offers the following benefits:




- Filtered 98°C drinking water, engineered specifically for hot water applications
- Included with every **PROBOIL2** system
- Recommended / Maximum replacement interval: 6 / 12 months
- Chlorine taste and odour reduction.
- Inbuilt corrosion protection
- Mineral adaption and scale reduction for protection
- Reduces scaling potential of the water
- WRAS approved



#### The complete package:

Each **PRONTEAU** system includes:

- A stylish choice of intelligent 3 way **PRONTEAU** mixer taps
- **PROBOIL2** hot water boiler
- **PROBOIL2** scale control filter & assembly
- Connecting hoses and safety vent
- Comprehensive user and installation guide
- Waste Plumbing Attachments
- Nationwide professional maintenance and service support

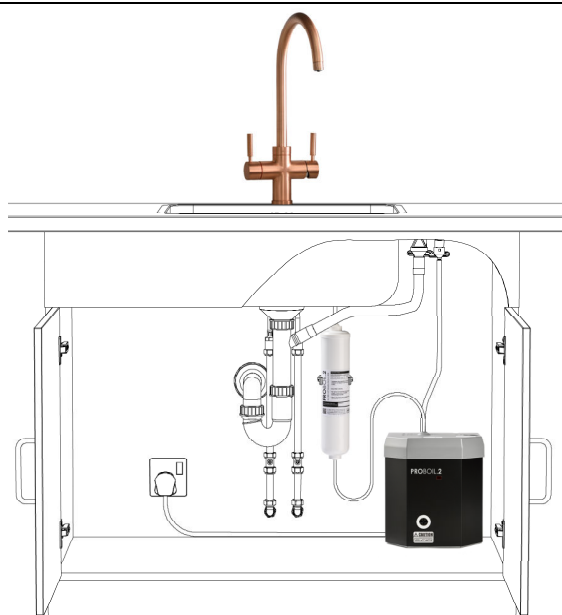

# WATER THE WAY YOU WANT IT